

- Simultaneous visualization of collector and tank temperature as well as heat quantity
- One 6-digit and two 4-digit 7-segment LED displays
- Simple connection via RESOLVBus®
- Outstanding design
- Power supply via RESOLVBus®

Further versions and customized layout of the front plate on request.

**Technical data**

**Housing:** High-grade steel frame with wood elements

**Dimensions:** 150x165x24 mm

**Protection type:** IP20 (suitable for dry rooms)

**Protection class:** III

**Display:** Numerical 7-segment LED display

**Segment size:** 7,5 x 10 mm, 10° digit inclination

**Ambient temperature:** 32 ... 104 °F


**Power supply:** via RESOLVBus®

**Bus connection:** RESOLVBus®



**Note:** The SD3 with temperature indication in °F can only be connected to controllers with temperature indication in °F.

## Smart display SD3

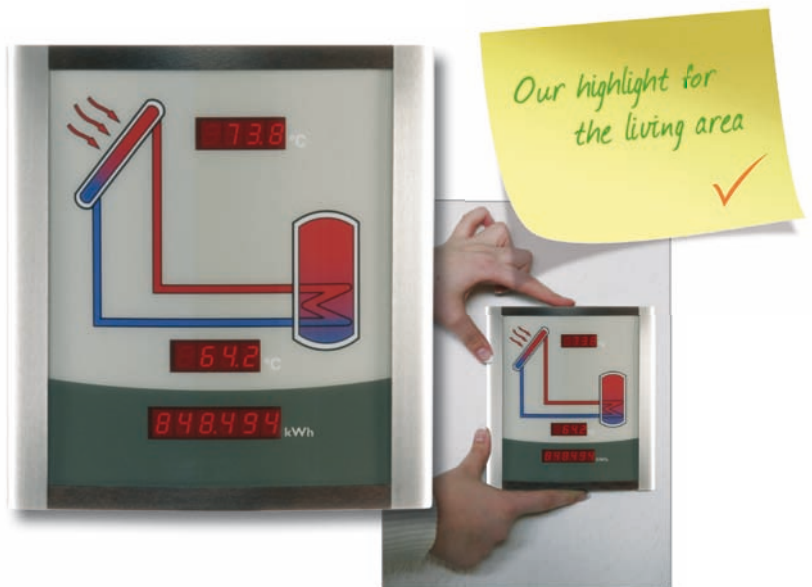

rosenthal design 

The Smart Display SD3 is designed for simple connection to RESOL controllers via the RESOLVBus® for visualization of the data issued by the controller: collector and tank temperatures as well as energy yield of the solar system.

The use of high-efficiency LEDs and filter glass assures a high optical brilliance and good readability - even in poor visibility conditions and at a larger distance. An additional power supply is not required.

### RESOL Smart Display SD3

Display module for the living area with 3 displays for collector- and tank temperature as well as for heat quantity (Unit °C)

Article-no.: 180 004 90

### RESOL Smart Display SD3

Display module for the living area with 3 displays for collector- and tank temperature as well as for heat quantity (Unit °F)

Article-no.: 180 007 77